



GB04/2161




INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed *AN. Brown*

Dated 9 June 2004

BEST AVAILABLE COPY

## Patents Form 1/77

Patents Act 1977  
(Rule 16)The  
Patent  
Office

23 MAY 2003

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

THE PATENT OFFICE  
JR

23 MAY 2003

RECEIVED BY FAX

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

## 1. Your reference

LIGERT/SAP

23MAY03 E809849-1 002682

## 2. Patent application number

(The Patent Office will fill in this part)

P0177700 G.00-0311945.0

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

05883376001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation.

Peter Ligertwood  
Unicol Engineering  
Green Road  
Headington  
Oxford  
OX3 8EU

0311945.0

## 4. Title of the invention

Stand

## 5. Name of your agent (if you have one)

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)Rock and Company  
Trelawn  
The Green  
Cassington  
Witney  
OX29 4DN

Patents ADP number (if you know it)

691220001 ✓

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

no

- a) any applicant named in part 3 is not an inventor; or
  - b) there is an inventor who is not named as an applicant; or
  - c) any named applicant is a corporate body.
- See note (d)

Patents Form 1/77

## Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

## Continuation sheets of this form

Description	8
Claim(s)	3
Abstract	1
Drawing(s)	12

10. If you are also filing any of the following, state how many against each item.

## Priority documents

## Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

23 May 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Olaf C Rock 01865 880389

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

1

## STAND

## TECHNICAL FIELD

5 This invention relates to a stand. It is particularly concerned with a stand of a free standing or mobile type for supporting a relatively bulky object above floor or ground level while providing for stable directional alignment of the object relative to a datum direction from the stand.

10 There is a widespread and increasing need for mounting a display unit, such as a plasma screen, so that a number of people can readily comprehend information displayed by way of the unit. In the case of areas such as concourses, airport passenger areas, sporting arenas and stations a display unit can be raised well above the general eye level and mounted on an existing structure. However for other viewing situations there arises a need for a free standing stand which is readily located at will in order to

15 support a display unit in a stable manner and at a height providing for unimpeded viewing by, say, visitors to exhibitions, seated individuals at a meeting, students under instruction or employees undergoing staff training. Such display locations, particularly when temporary, require the use of a display stand, which is either complete or readily assembled. The stand needs to be capable of ready location and removal or movement.

20 In addition a display unit needs to be provided with one or more external link/s to a power and/or a data source. The presence of such a link or links should not present a hazard to individuals moving in the vicinity of the stand especially when ambient light levels are low. In addition the attachment and securing of such links should not adversely affect the stability of the stand. It is also desirable in many locations,

25 particularly prestigious ones, that the overall appearance of the stand in use (along with any attachments and their means of attachment) should not present an untidy or ramshackle appearance.

30

## DISCLOSURE OF INVENTION

According to a first aspect of the present invention there is provided a stand comprising:

- 5 a floor mount,  
a location means for a unit to be supported; and  
at least one column extending between the floor mount to which it is attached  
by a first attachment and the location means which is attached to, or integral  
with, an upper region of the or each column; the column having a longitudinal  
10 axis which is curved relative to a straight line extending between the first  
attachment and the location means;  
the, or each, column serving to transmit loads applied to the stand by way of the  
location means to the floor mount; the, or each, column comprising a hollow  
channel substantially symmetrical about the longitudinal axis of the front  
15 panel; the hollow spine having a cross section in the region of the floor stand  
which is greater than the cross section of the spine in the region of the location  
means.

- According to a first preferred version of the first aspect of the present invention the, or  
20 at least one, column comprises in combination:  
a front panel extending between floor mount and the location means and  
reducing in horizontal cross section in passing upwardly from the floor mount  
to the location means; the front panel having a longitudinal axis which is curved  
relative to a straight line extending between the first attachment and the second  
25 attachment; and  
a hollow spine of U-section channel attached to the front panel such that the  
front panel serves to close the U-section such that the front panel and the hollow  
spine in combination provide a column substantially symmetrical about the  
longitudinal axis of the front panel; the hollow spine having a cross section in  
30 the region of the floor stand which is greater than the cross section of the spine  
in the region of the location means.

- According to a second preferred version of the first aspect of the present invention the, or at least one, column has a sequence of apertures along at least part of the length of a wall of the column channel to enable a cable to be readily inserted into and drawn along the channel so as to extend within the spine from an entry into the spine by way of an aperture in the sequence in the vicinity of the floor stand and to pass out of the column by way of an aperture in the sequence in the vicinity of the location means so as to provide for the cable to provide a shrouded path for data or power cable within the, or each, column having a sequence of apertures as aforesaid.
- 10 According to a third preferred version of the first aspect of the present invention or of any preceding preferred version thereof there is provided on the column in the vicinity of the location a coupling means including a socket or other supply termination for a power supply and/or a data coupling to enable a unit to be attached by means of attached to the locating means to be demountably attached to a power or data supply.
- 15 Typically the coupling is fed power and/or data by way of at least one cable extending from the coupling along the column by way of the hollow spine.

- According to a fourth preferred version of the first aspect of the present invention or of any preceding preferred version thereof the front panel incorporates at least one longitudinal slot extending through the panel; the slot having an edge on the side of the panel which extends contiguously with an outside of a side wall of the U-section channel such that a flat member inserted through the slot from the side of the panel on the opposite side to the side to which the spine is attached is enabled to pass through the slot and lie in contact with the side wall for support thereby over an extend contact area. Typically a shelf support extends through the slot for attachment to the spine; the support projecting outwardly from the front of the front panel to receive a shelf to support an item or item at a location beneath the location means.
- 20
- 25

- According to a fifth preferred version of the first aspect of the present invention or of any preceding preferred version thereof the floor mount is demountably attached to the column by coupling means so that a floor mount having given outside dimension
- 30

can only be attached to a column whose height is related to the outside dimensions of the floor mount so that the combination of the floor mount and the column can support an added display or other unit secured to the location means in a stable configuration without added support.

5

According to a sixth preferred version of the first aspect of the present invention or of any preceding preferred version wherein the floor mount is provided with wheels to enable the stand to be displaced by rolling on the wheels.

- 10 According to a second aspect of the present invention there is provided a display assembly comprising a display unit secured to the locating means of a stand as claimed in any preceding claim. Typically the display unit is a plasma screen.

#### BRIEF DESCRIPTION OF DRAWINGS

- 15 An exemplary embodiment of the invention will now be described with reference to the accompanying drawings of two embodiments of audio-visual equipment stand in respect of which:

(for a first embodiment)

- Figure 1 is a front view from the left-hand side;  
20 Figure 2 is a front elevation;  
Figure 3 is a side elevation;  
Figure 4 is a rear elevation; and  
Figure 5 is a view of the stand shown in Figures 1 to 4 with equipment mounted on it; and

- 25 (for a second embodiment)

- Figure 6 is a front view from the left-hand side;  
Figure 7 is a front elevation;  
Figure 8 is a side elevation;  
Figure 9 is a rear elevation;  
30 Figure 10 is a plan view from above;

5

Figure 11 is a view from the front of the stand shown in Figures 6 to 10 with equipment mounted on it; and

Figure 12 is a rear view of the stand of Figures 6 to 10 with a display screen mounted on it.

5

#### MODES FOR CARRYING OUT THE INVENTION

##### First Embodiment

Figures 1 to 5 variously show a stand 11 comprising a floor mount 12, a location pad 13 for a unit to be supported; and a column 14 extending between the floor mount 12 to the location pad 13 which, in this case, is integral with the column 14. The column 14 serves to transmit loads applied to the stand 11 by way of the location pad 13.

The column 14 comprises in combination: a front panel 16 extending between floor mount 12 and the location pad 13. The front panel 16 reduces in horizontal cross section in passing upwardly from the floor mount 12 to the location pad 13. The front panel 16 has a longitudinal axis 16A that is curved relative to a straight line 16B extending between foot 17 of the column 14 and the location pad 13.

A hollow spine 20 of U-section channel is attached to the back of the front panel 16 such that the front panel 16 serves to close the U-section. The front panel 16 and the hollow spine 20 in combination provide column 14. The hollow spine 20 has a horizontal cross section in the region of the floor mount 12 that is greater than the cross section of the spine 20 in the region of the location pad 13.

25

Turning now to Figures 4 and 5 the hollow spine 20 has in its rear wall 21 a sequence of apertures 22A - G along the length of spine to enable one or more power cables to be readily inserted into and drawn internally along the spine 20 so as to extend within the spine from entry aperture 22A adjacent the floor mount 12 up the spine 20 to a terminal block 25 above the location pad 13. In this case the terminal block provides individual sockets 25A - 25D. A similar path can be used to provide a route for data or

30



other signal carrying cables which can enter at the entry aperture 22A or can enter at some intermediate point in the length of the spine 20 (such as from equipment mounted on a shelf described hereafter in connection with Figure 5).

- 5 The front plate 16 of the column 14 is pierced by two vertical parallel slots 30, 31. These pass through plate 16 and open onto back 16B of the plate 16 close to a sidewall of the spine 20. In the case of slot 31 (Figure 3) there is mounted on wall region W, of spine 20, adjacent to, and running the length of, the slot 31 a spaced sequence of pegs (34A – G). An adjacent vertical pair of pegs in the sequence serve to anchor a shelf 35 the in-
- 10 board end of a support bracket 36A whose outboard end extends through the slot 31 to provide a support on the front of the column 14 for shelf 35. A matching shelf support 36B extends through slot 30 and is retained on the spine 20 in a way mirroring that of support bracket 36.
- 15 The vertical separation of the pegs 34A – G is selected to ensure that despite the curvature of the column along wall region W the vertical separation of shelf 35 from any other shelf also located on the column is kept constant and the shelf is maintained horizontal. In this first embodiment it is provided so that up to three shelves can be located and used at any one time.
- 20 Figure 5 shows a plasma screen 40 secured to the location pad 13 by way of a mounting frame 41.

The shelf 35 serves to support electronic equipment for use with the plasma screen 40 such as a video playback unit. Such a unit is readily powered from the terminal block 25 and the cable for this [purpose, as well as a data link cable from the recorder to the plasma screen, is readily and tidily housed in the spine 20 making use of one of intermediate apertures in the sequence aperture 22B to 22G.

- 30 In this first embodiment the column 14 is attached by projections (not shown) and bolts 41, 42 to the wheeled base 12. The location of castors 43 – 46 is selected to ensure

that the centre of gravity of the assembled stand and display unit lies well within the area bounded by the castors 43 - 46.

### Second Embodiment

- 5 Figures 6 to 12 variously show a stand 61 comprising a floor mount 62; a location region 63 for a unit to be supported; and columns 64, 65 extending between the floor mount 62 to the location region 63. The column 64, 65 serves to transmit loads applied to the stand 11 in the location region 63.
- 10 In view of the identical form and function of columns 64, 65 in what follows the features of column 64 are described and components identified by a reference numeral. Following the reference numeral for column 64 the corresponding reference numeral for column 65 is shown in brackets but are not described further.
- 15 Column 64 (65) comprises a square section hollow tube. Column 64 (65) has a longitudinal axis 64A (65A) which is curved relative to a straight line 64B (65B) extending between foot 67 (68) of the column 64 (65) and the part of column 64 (65) lying in the location region 63. At foot 67 (68) of column 64 (65) there is provided an integral foot 70 (71).
- 20 Turning now to Figures 9 and 12 the column 64 (65) has in its rear wall 72 (73) a sequence of apertures 74A - G (75A - G) along the length of the column 64 (65) to enable one or more power cables to be readily inserted into and drawn internally along the column 64 (65) so as to extend within the spine from entry aperture 74A
- 25 (75A) adjacent the integral foot 70 (71) up the column 64 (65) to a terminal block 77 in the location region 63. In this embodiment end 70A (71A) of the integral foot 70 (71) is open and can provide a further possible entry point for cabling.
- 30 In this case the terminal block 77 provides individual power sockets. A similar path can be used to provide a route for data or other signal carrying cables which can enter at the entry aperture 74A (75A) or can enter at some intermediate point in the length of

the column 64 (65) (such as from equipment mounted on a shelf described hereafter in connection with Figure 11).

Figure 11 shows the stand of Figures 6 – 10 when equipped with a plasma screen 79 (see also Figure 12) and a shelf 80 secured by clamp 81 to a mounting bracket 82. In this embodiment the bracket is attached to the columns 64 (65) by means of apertures in the sequence 74 A – G (75 A – G). The shelf 80 is used for an electronic unit (such as a video recorder) used in combination with screen 79.

Figure 12 shows a mounting plate 78 secured to the columns 64 (65) in the location region 63. The mounting plate 78 is selected so as to accommodate the plasma screen 79 to be used.

In this second embodiment the floor mount 62 is a flat plate which is readily slid over smooth and/or uniform surfaces. The dimensions of the floor mount 62 and the curvature of columns 64 (65) is selected to ensure that with a given plasma screen 79 in place the centre of gravity of the screen/column combination lies well within the plan area of the floor mount so as to provide for a stable configuration in use.

#### INDUSTRIAL APPLICABILITY

The two embodiments show freestanding columns of striking appearance for use with types of audio/visual equipment. Examples of display units are shown but the stands could be used for other equipment requiring an elevated position such as a loud speaker or array of speakers. In use either of the stands provides for equipment to be connected to one or more cables. These can reach the stand over surrounding ground, floor or carpet and enter the column at a low point, pass up the column to a socket or other connection arrangement in the vicinity of the region of the unit mounted at the top of the stand. This provides for a tidy appearance. The stands also provide for the ready mounting of additional equipment to be used with a display unit as shown located on the upper part of the stand.

## CLAIMS

## 1 A stand comprising:

a floor mount,

5

a location means for a unit to be supported; and

at least one column extending between the floor mount to which it is attached by a first attachment and the location means which is attached to, or integral with, an upper region of the or each column; the column having a longitudinal axis which is curved relative to a straight line

10

extending between the first attachment and the location means;

the, or each, column serving to transmit loads applied to the stand by way of the location means to the floor mount; the, or each, column comprising a hollow channel substantially symmetrical about the longitudinal axis of the front panel; the hollow spine having a cross section in the region of the floor stand which is greater than the cross section of the spine in the region of the location means.

15

## 2 A stand as claimed in Claim 1 wherein the, or at least one, column comprises in combination:

20

a front panel extending between floor mount and the location means and reducing in horizontal cross section in passing upwardly from the floor mount to the location means; the front panel having a longitudinal axis which is curved relative to a straight line extending between the first attachment and the second attachment; and

25

a hollow spine of U-section channel attached to the front panel such that the front panel serves to close the U-section such that the front panel and the hollow spine in combination provide a column substantially symmetrical about the longitudinal axis of the front panel; the hollow spine having a cross section in the region of the floor stand which is greater than the cross section of the spine in the region of the location means.

30

10

3 A stand as claimed in Claim 1 wherein the, or at least one, column has a  
sequence of apertures along at least part of the length of a wall of the column  
channel to enable a cable to be readily inserted into and drawn along the  
channel so as to extend within the spine from an entry into the spine by way of  
5 an aperture in the sequence in the vicinity of the floor stand and to pass out of  
the column by way of an aperture in the sequence in the vicinity of the location  
means so as to provide for the cable to provide a shrouded path for data or  
power cable within the, or each, column having a sequence of apertures as  
aforesaid.

10

4 A stand as claimed in any preceding claim wherein there is provided on the  
column in the vicinity of the location a coupling means including a socket or  
other supply termination for a power supply and/or a data coupling to enable a  
unit to be attached by means of attached to the locating means to be  
15 demountably attached to a power or data supply.

5 A stand as claimed in Claim 4 wherein the coupling is fed power and/or data  
by way of at least one cable extending from the coupling along the column by  
way of the hollow spine.

20

6 A stand as claimed in any preceding claim wherein the front panel incorporates  
at least one longitudinal slot extending through the panel; the slot having an  
edge on the side of the panel which extends contiguously with an outside of a  
side wall of the U-section channel such that a flat member inserted through the  
25 slot from the side of the panel on the opposite side to the side to which the spine  
is attached is enabled to pass through the slot and lie in contact with the side  
wall for support thereby over an extend contact area.

25

7 A stand as claimed in Claim 5 wherein a shelf support extends through the slot  
30 for attachment to the spine; the support projecting outwardly from the front of

30

11

the front panel to receive a shelf to support an item or item at a location beneath the location means.

- 8 A stand as claimed in any preceding claim wherein the floor mount is  
5 demountably attached to the column by coupling means so that a floor mount having given outside dimension can only be attached to a column whose height is related to the outside dimensions of the floor mount so that the combination of the floor mount and the column can support an added display or other unit secured to the location means in a stable configuration without added support.
- 10 9 A stand as claimed in any preceding claim wherein the floor mount is provided with wheels to enable the stand to be displaced by rolling on the wheels.
- 10 10 A stand as hereinbefore described with reference to the accompanying  
15 drawings.
- 11 A display assembly comprising a display unit secured to the locating means of a stand as claimed in any preceding claim.
- 20 12 A display assembly as claimed in Claim 11 wherein the display unit is plasma screen.


## ABSTRACT

## STAND

- 5 A stand comprising: a floor mount, a location means for a unit to be supported; and at least one column extending between the floor mount to which it is attached by a first attachment and the location means which is attached to, or integral with, an upper region of the or each column; the column having a longitudinal axis which is curved relative to a straight line extending between the first attachment and the location
- 10 means; the, or each, column serving to transmit loads applied to the stand by way of the location means to the floor mount; the, or each, column comprising a hollow channel substantially symmetrical about the longitudinal axis of the front panel; the hollow spine having a cross section in the region of the floor stand which is greater than the cross section of the spine in the region of the location means.

1/12


Fig/

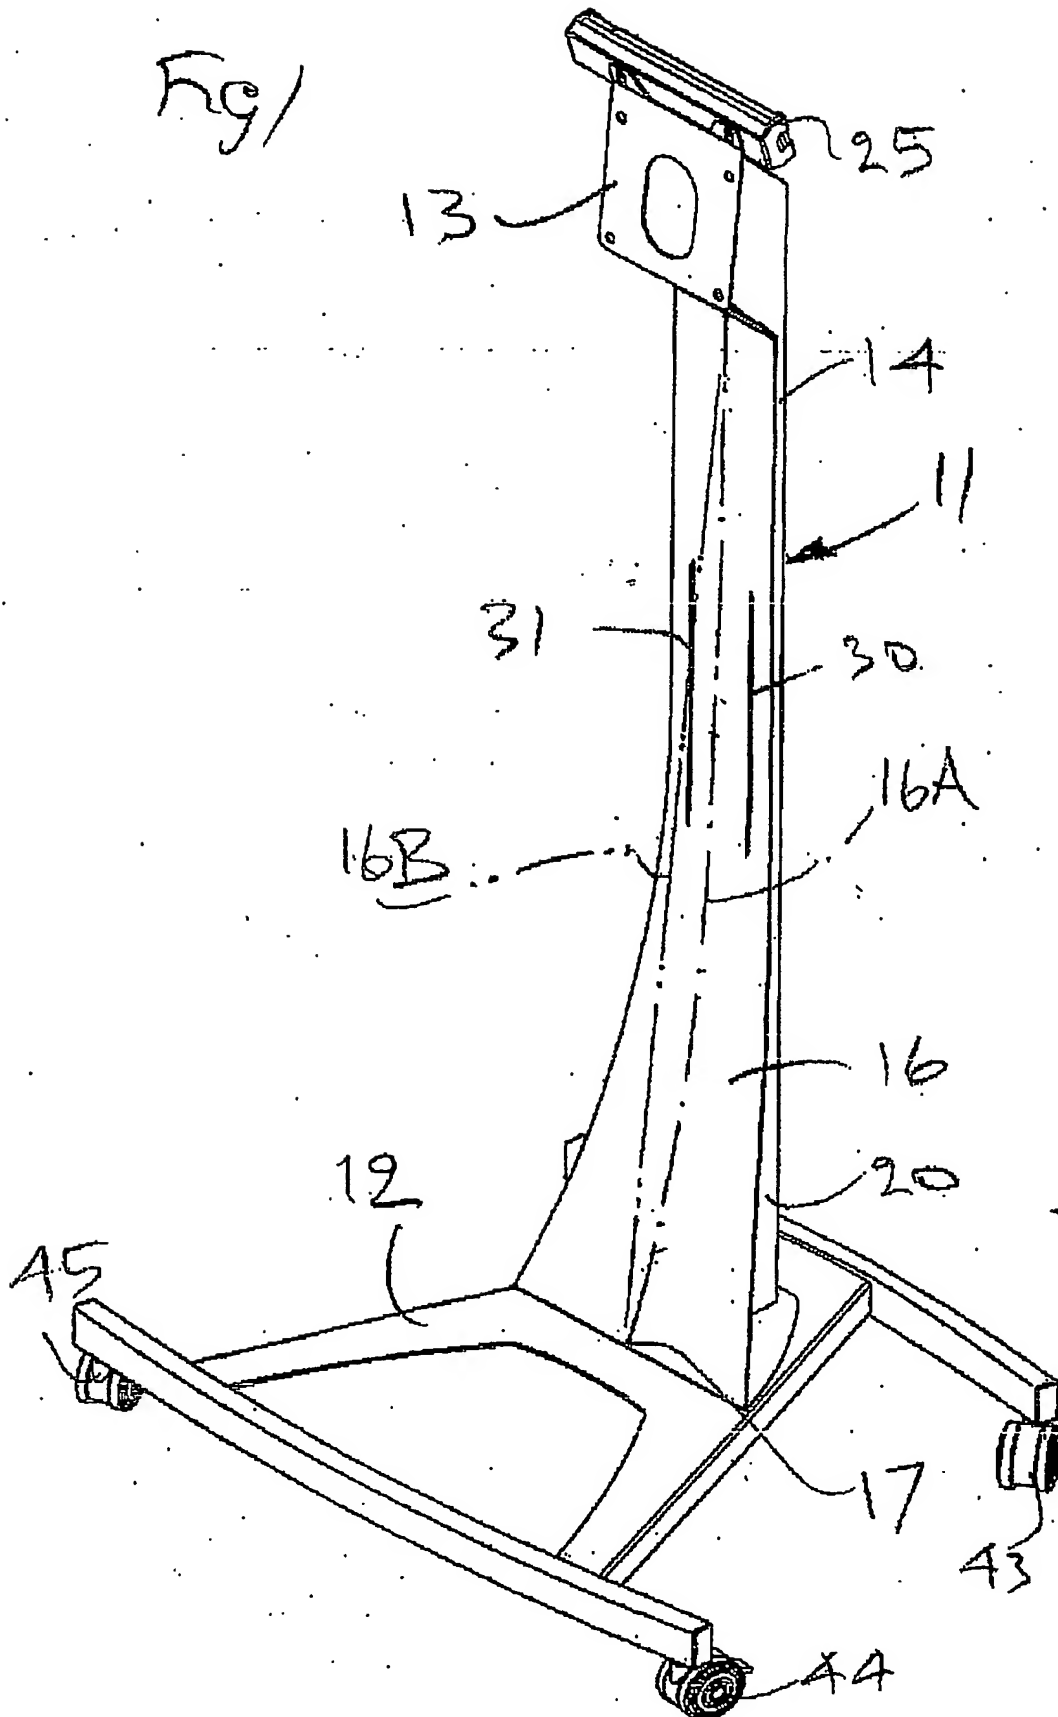




2/12


Fig 2

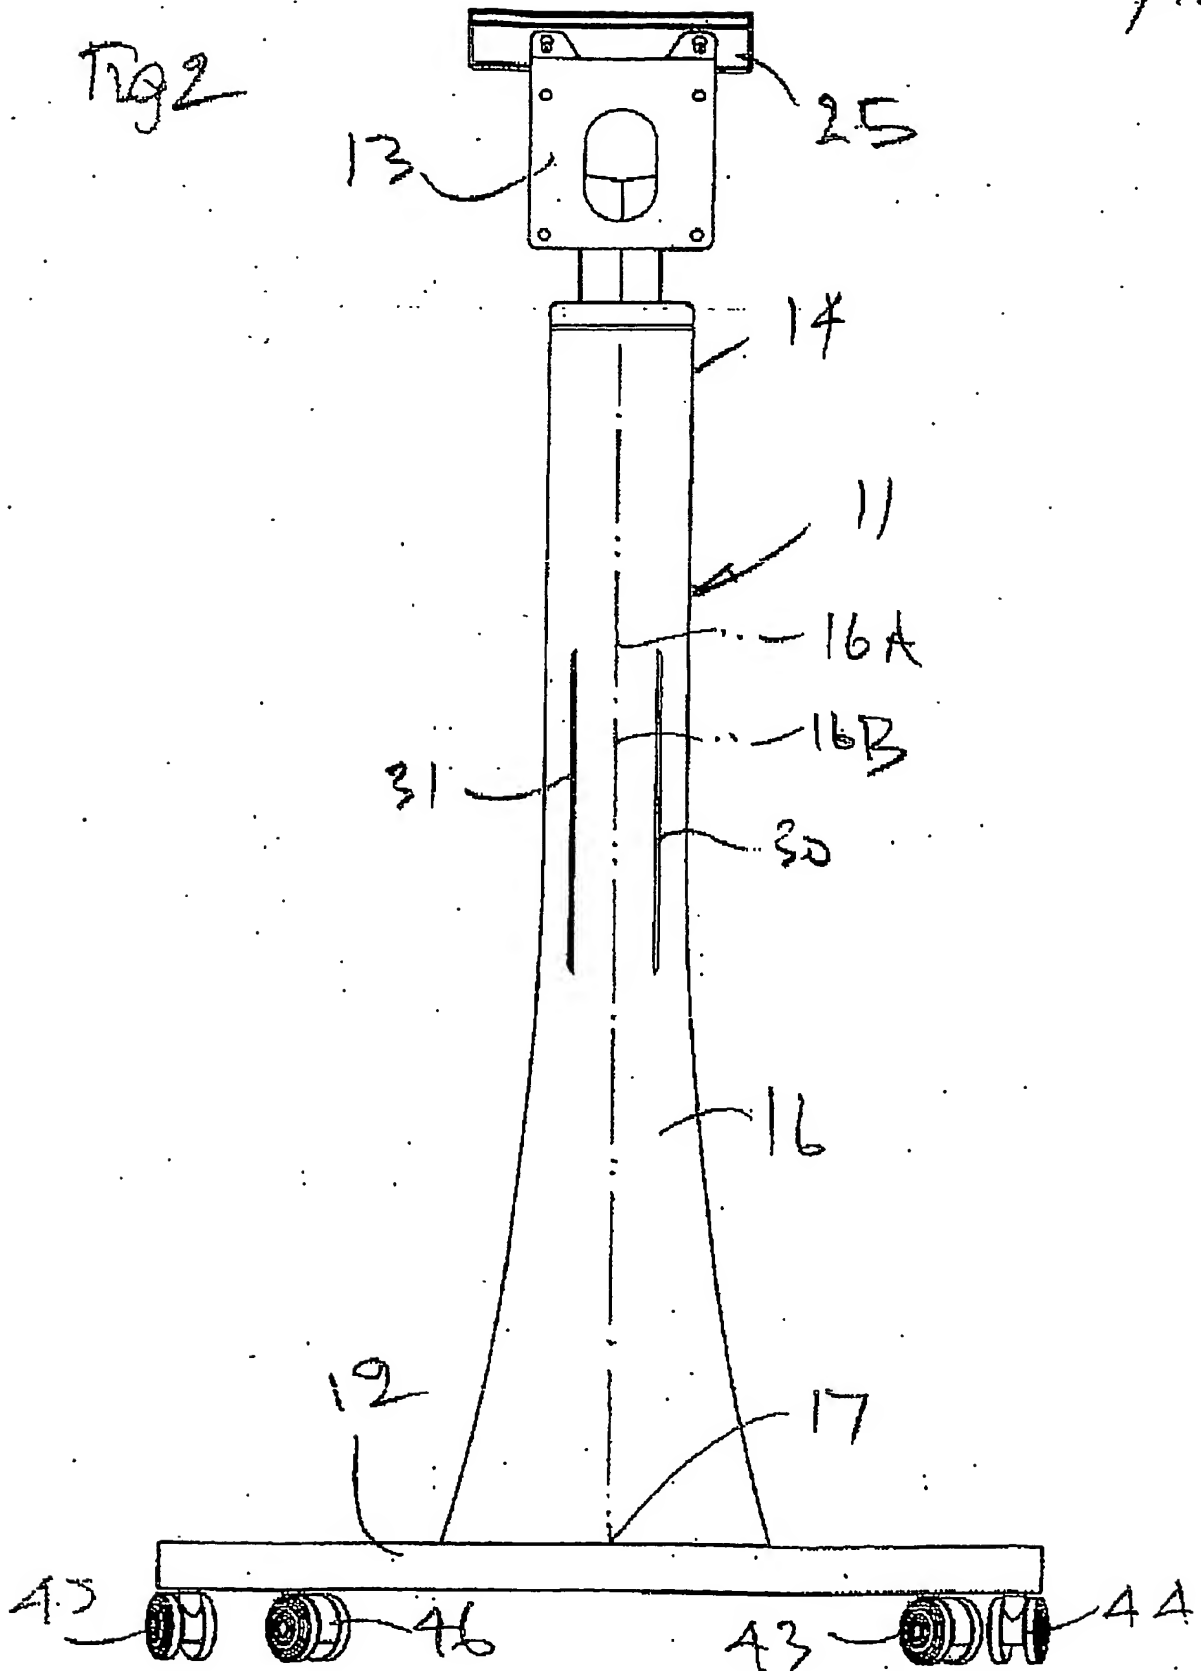

9

3/12

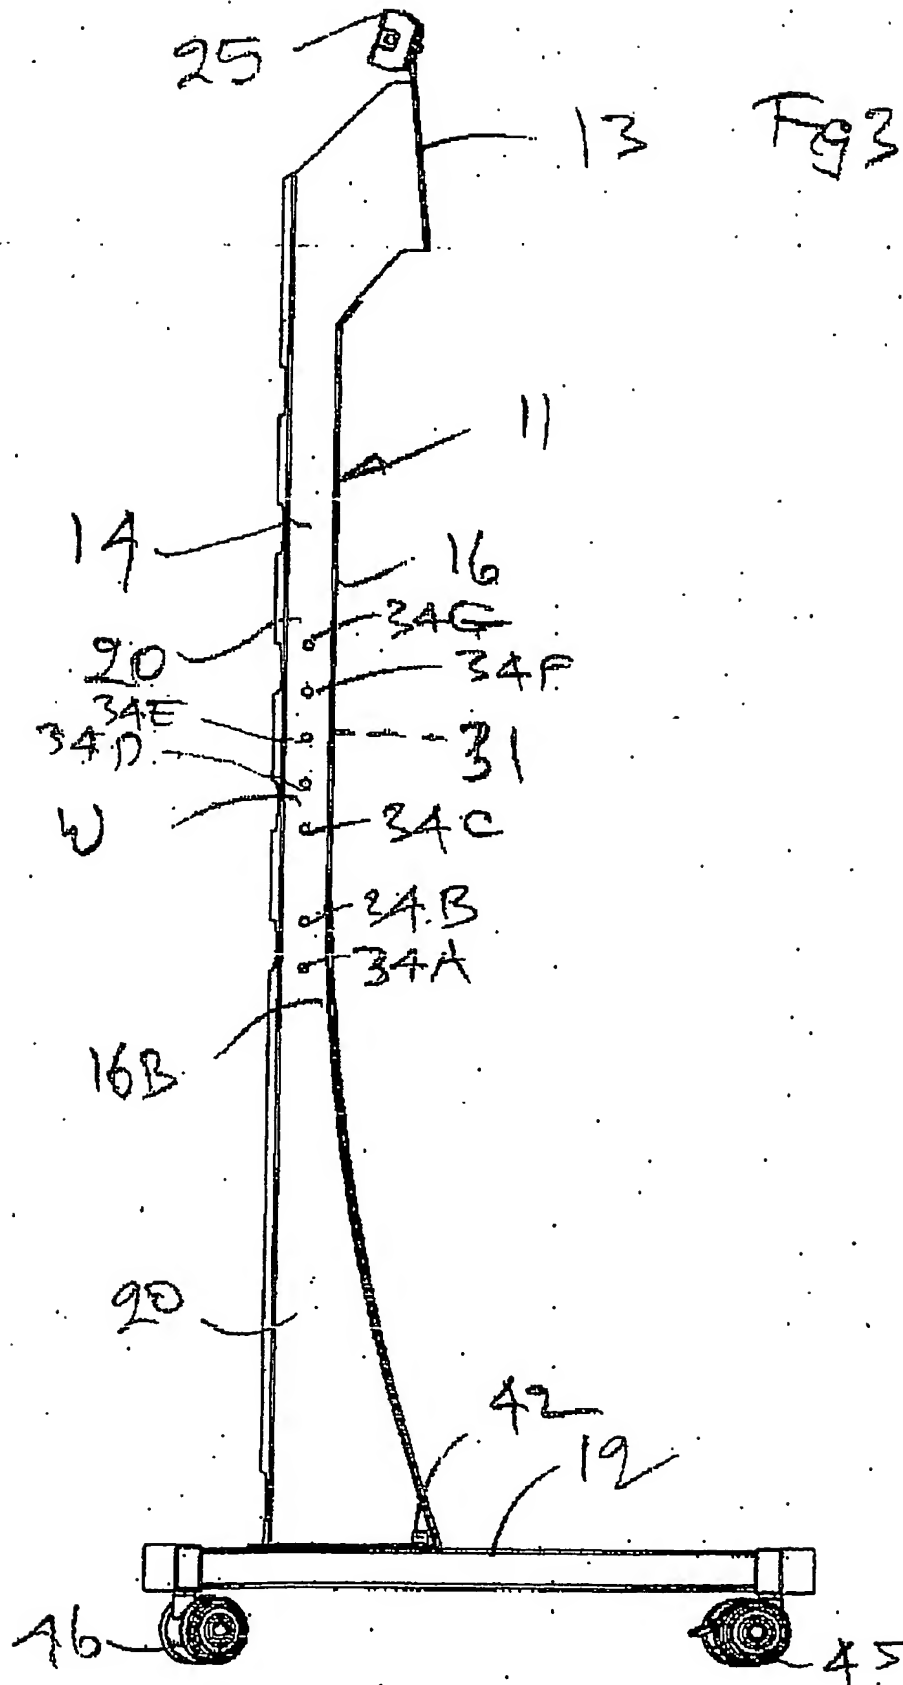

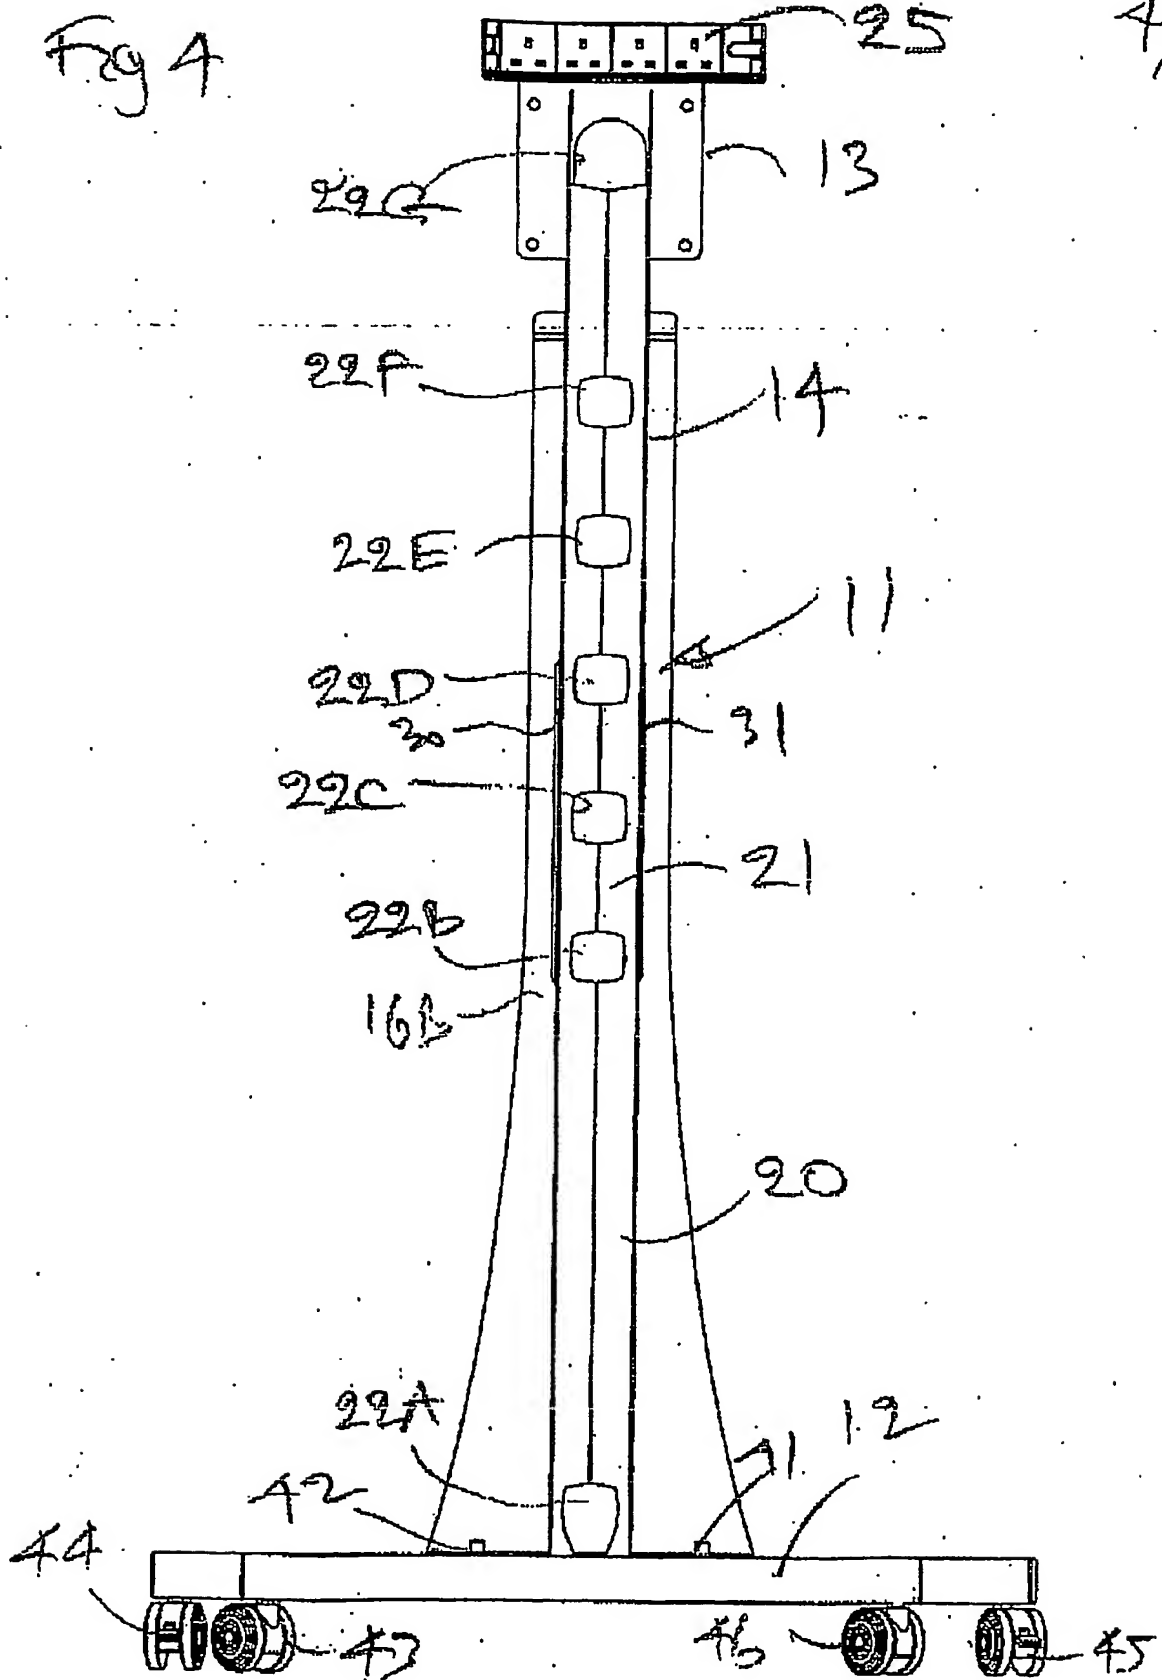

5/12


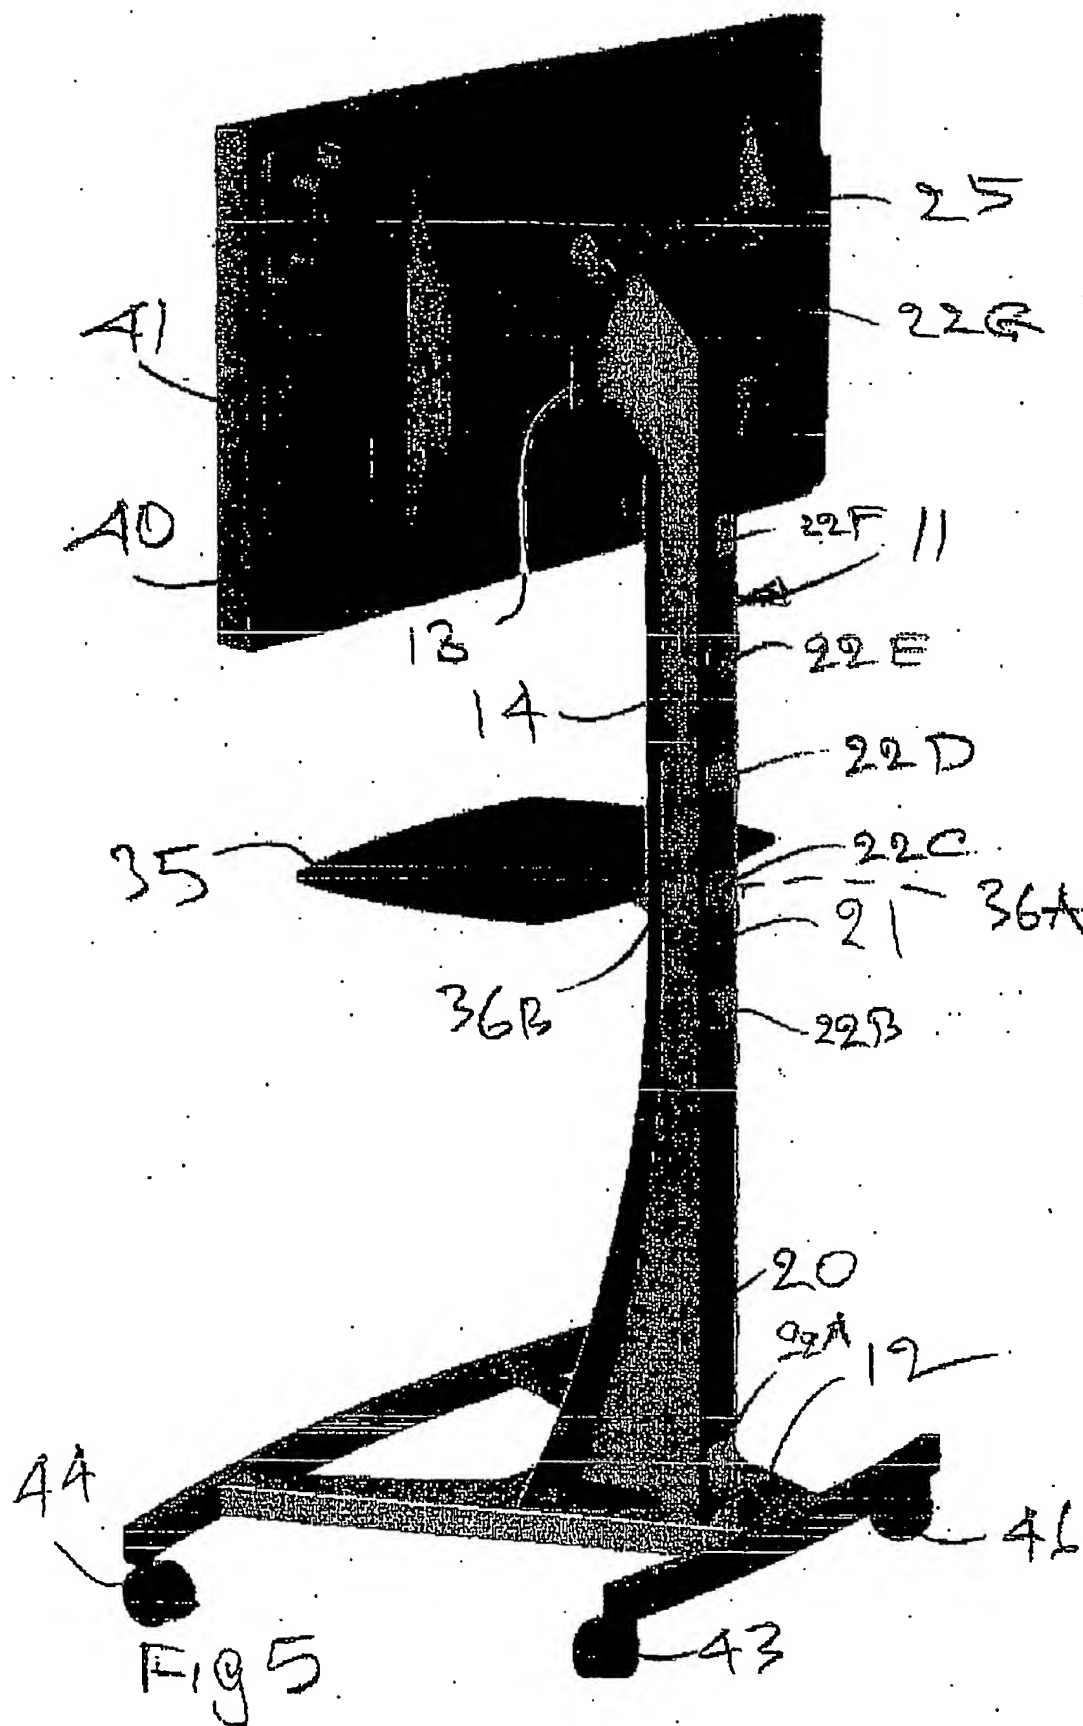


Fig 5

5


6/12

Fig 6

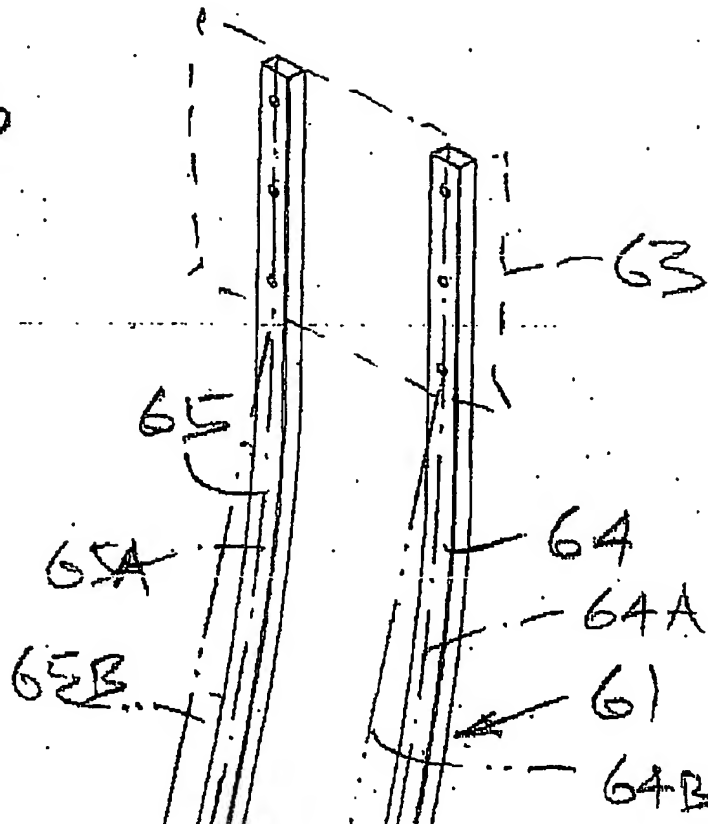


7/12

Fig 7

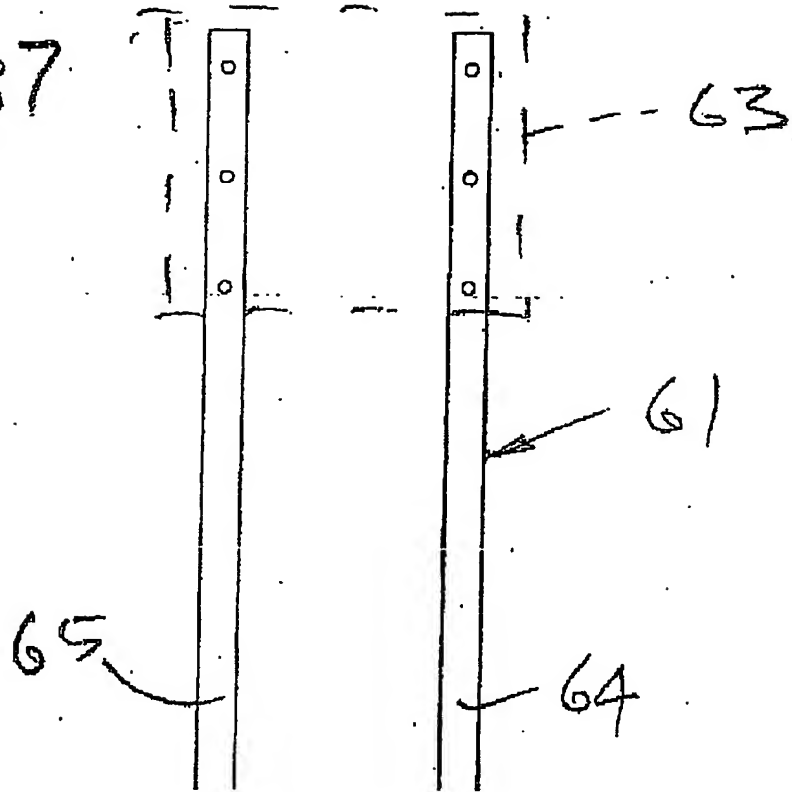

8/12

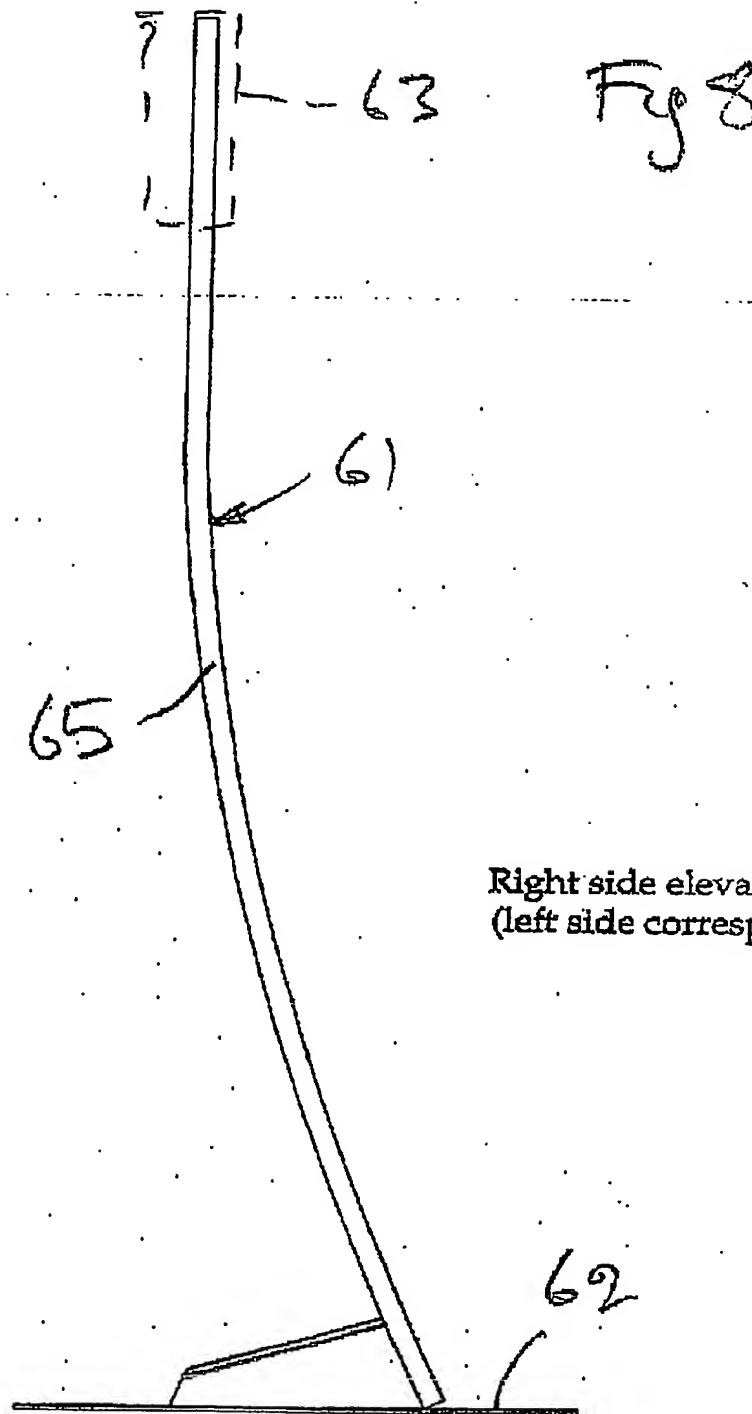

9/12


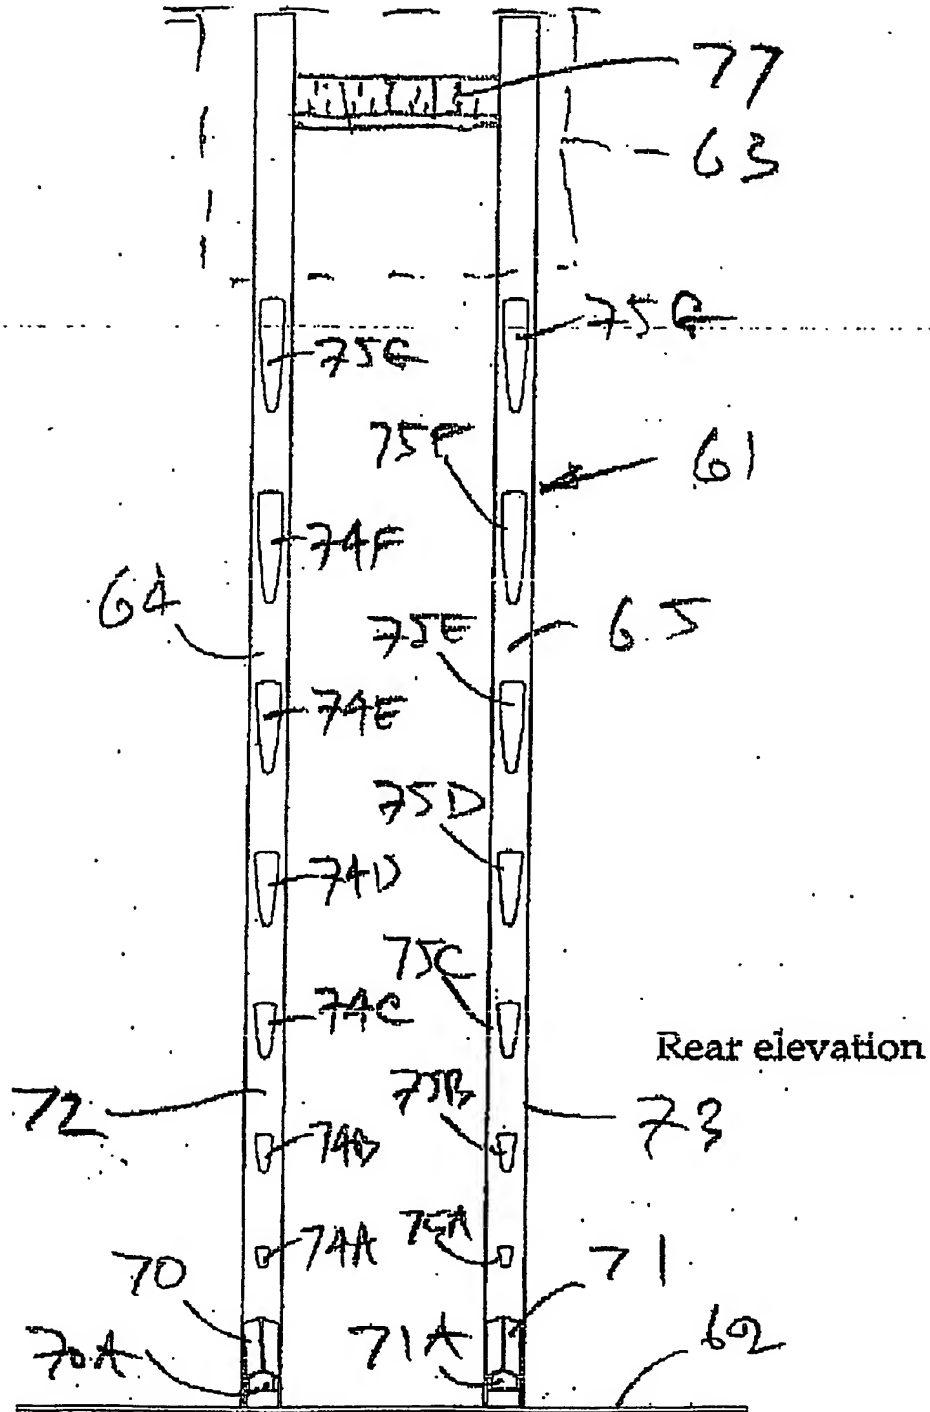


Fig 9




10/12

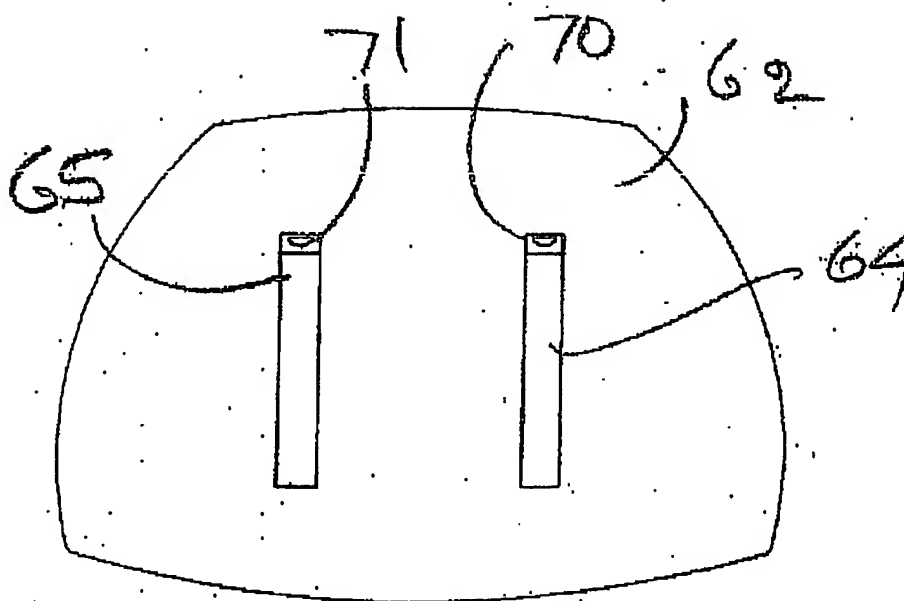

Plan view from above

Fig 10


11/12

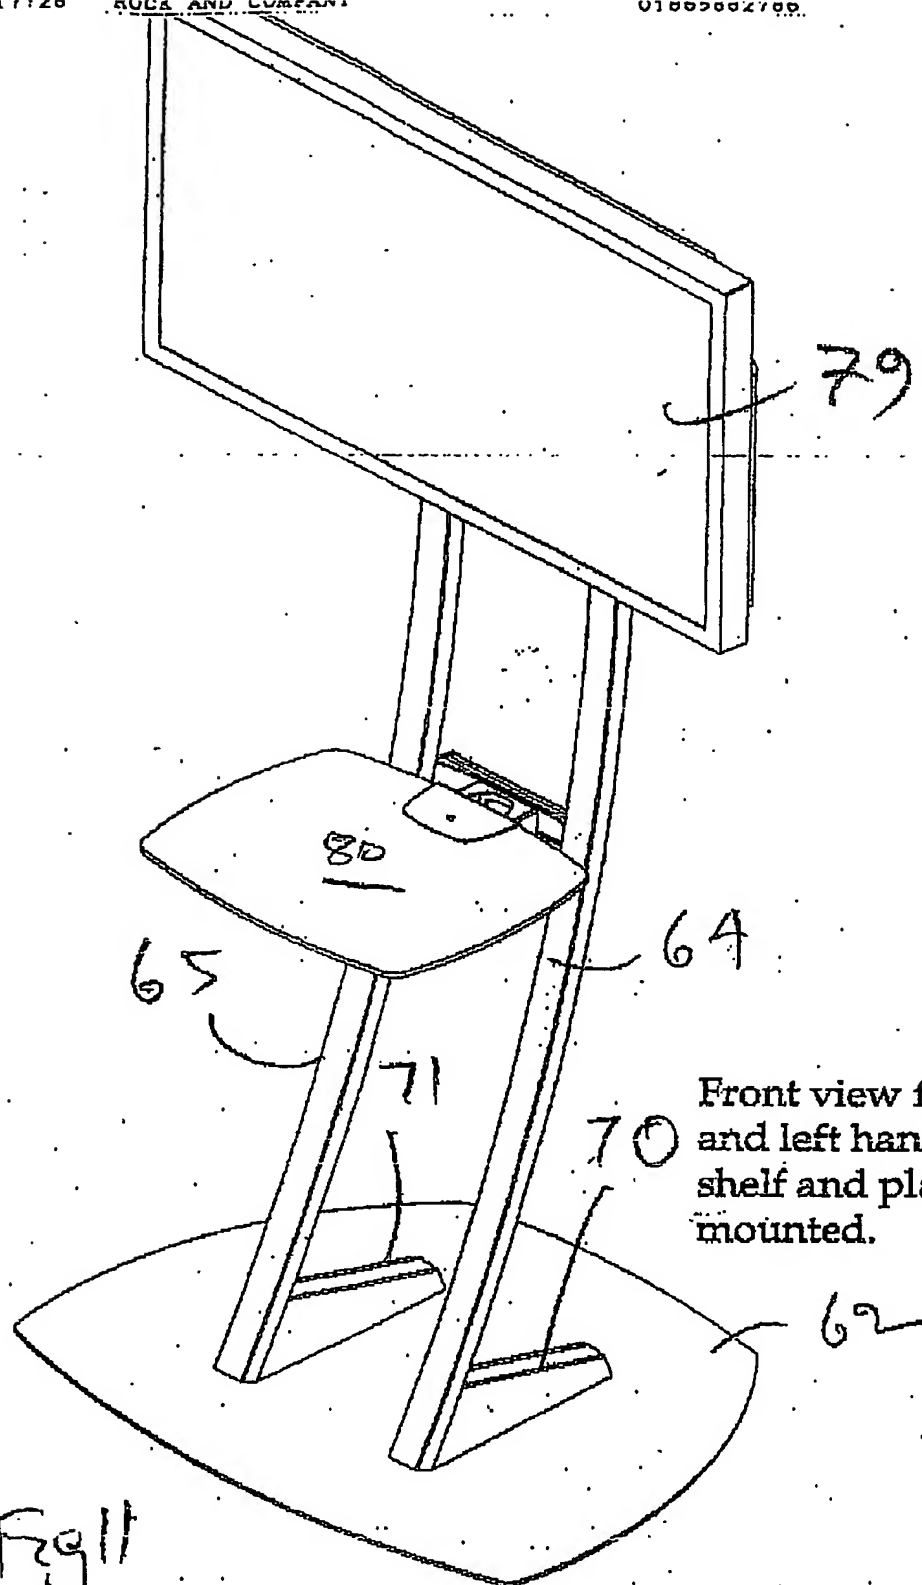

Front view from above and left hand side with shelf and plasma screen mounted.

Fig 11

11

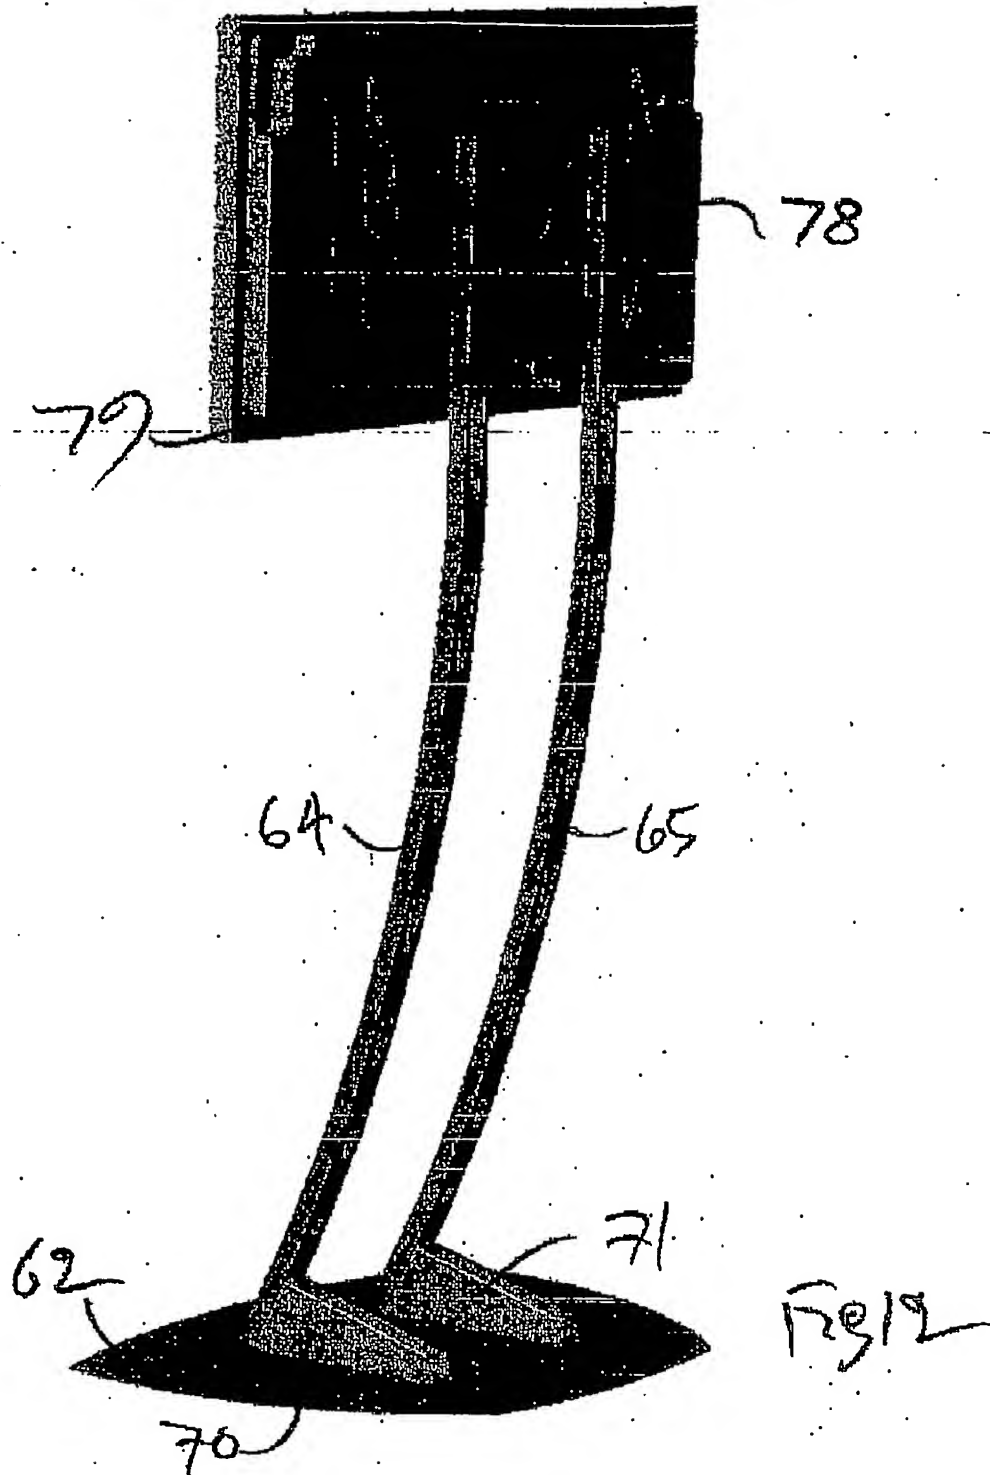

Rear view from left-hand side with plasma screen mounted

PCT/GB2004/002161



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**